KOHLER FAUCETS

PINSTRIPE™

Features

- *Metal construction*
- *Deck-mount*
- *Available with cross or lever handles*
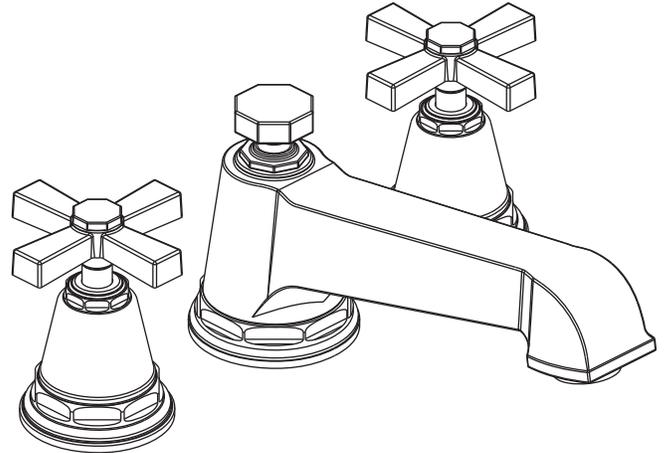- *7-1/16″ (179 mm) non-diverter spout with slip-fit connection*

Codes/Standards Applicable

Specified model meets or exceeds the following:

- *ASME A112.18.1/CSA B125.1*
- *IAPMO/UPC*
- *ICC/ANSI A117.1*

DECK-MOUNT BATH FAUCET TRIM
K-T13140

ADA

Colors/Finishes

- CP: Polished Chrome
- Other: Refer to Price Book for additional colors/finishes

Specified Model

Model	Description	ADA (plain cross)		ADA (grooved cross)		ADA (plain lever)		ADA (grooved lever)	
K-T13140-3A	Bath faucet trim with plain cross handles	❏ CP	❏ Other ____						
K-T13140-3B	Bath faucet trim with grooved cross handles			❏ CP	❏ Other ____				
K-T13140-4A	Bath faucet trim with plain lever handles					❏ CP	❏ Other ____		
K-T13140-4B	Bath faucet trim with grooved lever handles							❏ CP	❏ Other ____

Product Specification

Two-handle deck-mount high-flow bath faucet trim shall be of metal construction. Product shall include 7-1/16″ (179 mm) non-diverter spout, with slip-fit connection, and handles. Faucet trim shall be Kohler Model K-T13140-_____-_____ and valve system shall be Kohler Model K-_____-K__-NA.

PINSTRIPE™

Required Accessory	
K-300-K	1/2″ High-flow ceramic disc valve system
K-300-KR	1/2″ High-flow ceramic disc valve system, rigid connections
K-301-K	3/4″ High-flow ceramic disc valve system

Technical Information

Mexico faucets and fittings have an **M** after the first sequence of numbers (such as K-12345**M**).	
Applicable faucet trim:	
Bath faucet trim with plain cross handles	K-T13140-3A
Bath faucet trim with grooved cross handles	K-T13140-3B
Bath faucet trim with plain lever handles	K-T13140-4A
Bath faucet trim with grooved lever handles	K-T13140-4B

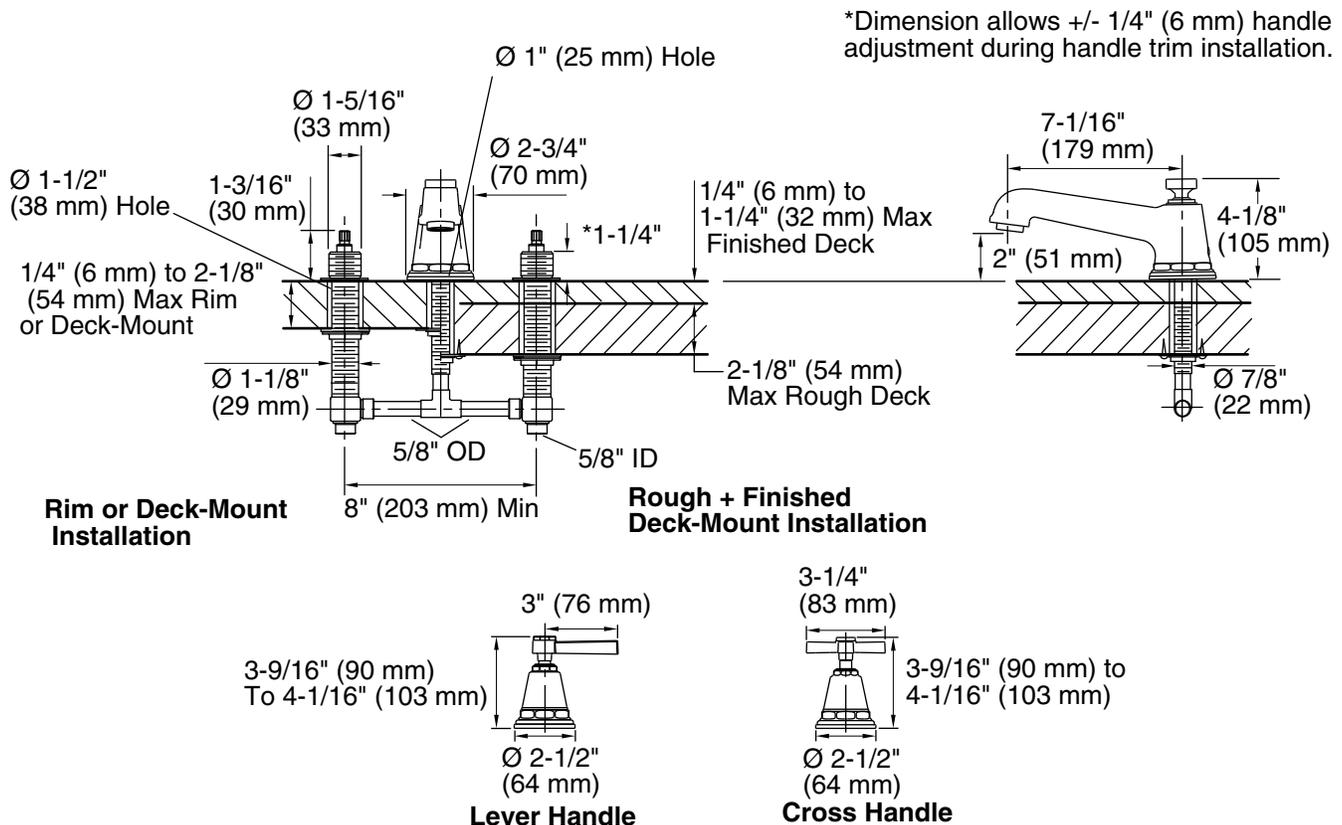| Applicable valve*:		
1/2″ valve system	K-300-K	shown
1/2″ valve system with rigid connections	K-300-KR	not shown
3/4″ valve system	K-301-K	not shown
* Required for the configuration illustrated.		
Handles are ADA compliant		**ADA**

Installation Notes

Install this product according to the installation guide.

*Dimension allows +/- 1/4" (6 mm) handle adjustment during handle trim installation.

Ø 1" (25 mm) Hole

Ø 1-5/16" (33 mm)

Ø 2-3/4" (70 mm)

Ø 1-1/2" (38 mm) Hole

1-3/16" (30 mm)

*1-1/4"

1/4" (6 mm) to 1-1/4" (32 mm) Max Finished Deck

7-1/16" (179 mm)

4-1/8" (105 mm)

2" (51 mm)

1/4" (6 mm) to 2-1/8" (54 mm) Max Rim or Deck-Mount

Ø 1-1/8" (29 mm)

2-1/8" (54 mm) Max Rough Deck

Ø 7/8" (22 mm)

5/8" OD

5/8" ID

Rim or Deck-Mount Installation

8" (203 mm) Min

Rough + Finished Deck-Mount Installation

3" (76 mm)

3-1/4" (83 mm)

3-9/16" (90 mm) To 4-1/16" (103 mm)

3-9/16" (90 mm) to 4-1/16" (103 mm)

Ø 2-1/2" (64 mm)

Ø 2-1/2" (64 mm)

Lever Handle

Cross Handle

Product Diagram

THE BOLD LOOK OF **KOHLER**®