

► Code Number

3346050

► Specifications

- Modular One-piece Construction and easily attaches to deck surface
- Four (4) D-size Alkaline Batteries included (Model ESD-350)
- Four (4) D-size Alkaline Batteries included
- Low Battery Indicator
- Four (4) D-size Alkaline Batteries included (Model ESD-350)
- Low Soap Level Indicator
- One tool service
- All electronics sealed
- Unit supplied with one 800 ml. Container of Lotion Soap

► SOAP REPLACEMENT

- When the soap bottle is empty, a new bottle must be used. The bottle furnished with the unit is not designed to be refilled. Altering the bottle and refilling it with soap will void the warranty of the product.
- 1-866-700-CLEAN (1-866-700-2532)
- Or go to our website: www.optimasoap.com
- Refills are also available through your local plumbing or janitorial supply distributor.

► Soap Refill Cartridges Available

- ESD-217 — 800 ml. bottle of Lotion Soap
- ESD-232 — 1600 ml. bottle of Lotion Soap
- ESD-231 — 800 ml. bottle of Anti-bacterial Soap
- ESD-233 — 1600 ml. bottle of Anti-bacterial Soap



► Benefits


- Sloan model no. ESD-200 Infrared sensor activated electronic soap dispenser. It uses a refill bottle that simplifies replacement and reduces waste. Its sensor technology offers hands-free operation by delivering a pre-measured foam soap application "on demand." The product shall be tested and certified to industry standards.
- Economical pre-measured soap dispensing saves soap and money
- Soap refill cartridge is easy to replace and provides a new mechanism and soap path with every replacement
- Flashing "red" light indicates soap replacement required for continuous soap dispensing
- Three-year Warranty (limited)
- Eliminates "untidy and clumsy" refillable containers

► Compliance & Certifications



This space for Architect/Engineer Approval

► OPERATION

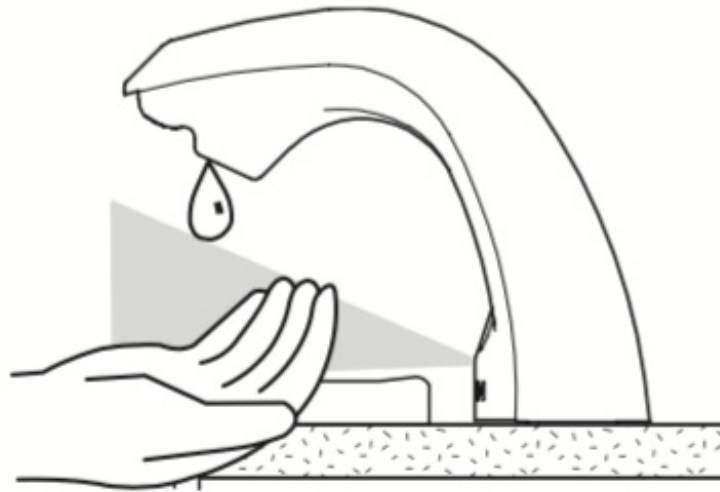

As the user's hands enter the beam's effective range, the beam is reflected back into the sensor receiver and activates the solenoid valve allowing a single soap application to flow from the spout.

Flashing "red" light in the sensor window indicates low refill

Flashing "yellow" light in the sensor window indicates low battery

ESD-200

► Line Drawing

