"QUALITY PUMPS SINCE 1939"

SECTION: 4.10.110
FM0732
0706
Supersedes
0705

ZOELLER PUMP CO.®

A-PAK - ALARM SYSTEMS

INDOOR/OUTDOOR ALARM SYSTEM FEATURES

- Indoor & Outdoor use per UL 864.
- UL Listed and CSA Certified.
- Alarm system (horn & light) operates to warn of a high water condition.
- Horn is rated 82 decibels at 10'.
- Alarm Test and Horn Silence Switch with auto reset.
- Terminal connections for a pump & float switch.

Standard Model (P/N 10-0623) Includes:
- 15 ft. float switch.

Deluxe Model (P/N 10-0682) Includes:
- 20 ft. float switch.
- 6 ft. power cord plugs into 115V outlet.
- Watertight cord connectors.

"A-PAK" ALARM SYSTEM FEATURES

10-1494 (115V/1Ph/9V DC)
- Auto reset solid state alarm.
- 9 Volt battery back-up (battery not included).
- NEMA 1 non-corrosive enclosure for indoor use.
- Manual shut off.
- Float operates on 12 VAC.
- Float switch with 15' cable included.
- 6 ft. power cord plugs into 115V outlet.
- Horn is rated at 86 decibels at 10'.

"A-PAK II" ALARM SYSTEM FEATURES

10-0126 (115V/1Ph)
- NEMA 4X thermoplastic alarm panel.
- Horn & light warn of high liquid levels
- Test and silence switch.
- Auxiliary dry high level alarm contacts - 5 amps.
- Operates on separate circuit from pump 115 VAC.
- UL Listed for US & Canada.
- Float switch with 15 ft. cable included.
- Can be used with liquids to 140°F (60°C).
- Horn is rated at 88 decibels at 10'.

10-0015 (115V) / 10-0016 (230V)
- Non-enclosed model.
- 6" magnetic bell with transformer.
- Mount on standard utility box (not included).
- Operates with 10-0743 float switch or mechanical alternator (not included).

Note: All variable level float switches in this section are mechanically activated and do not contain mercury.

Model 10-0623

Tested to UL Standard UL 508 & Certified to CSA Standard C22.2 No. 205

Model 10-1494

Tested to UL Standard UL 508 & Certified to CSA Standard C22.2 No. 205

Model 10-0126

Tested to UL Standard UL 508 & Certified to CSA Standard C22.2 No. 205

Side View Model 10-0126
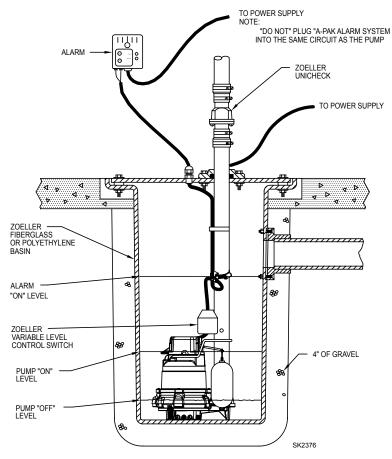

Models 10-0015 & 10-0016

A-PAK - ALARM SYSTEMS

10-0028 (115V/1Ph)

- Non-Enclosed model.
- Operates on 115V circuit.
- 3" magnetic bell with transformer.
- Mount on standard utility box. (Not Included).
- Float switch with 15 ft. cable included.

Model 10-0028

ALARM

TO POWER SUPPLY
NOTE:
"DO NOT" PLUG "A-PAK ALARM SYSTEM
INTO THE SAME CIRCUIT AS THE PUMP

ZOELLER
UNICHECK

TO POWER SUPPLY

ZOELLER
FIBERGLASS
OR POLYETHYLENE
BASIN

ALARM
"ON" LEVEL

ZOELLER
VARIABLE LEVEL
CONTROL SWITCH

PUMP "ON"
LEVEL

PUMP "OFF"
LEVEL

4" OF GRAVEL

SK2376

A-PAK PUMP ALARM SYSTEMS

MODEL #	VOLTS	PANEL	SWITCH	AUX. CONTACTS	UL	CSA
10-0015	115V	N/A	Alarm Float P/N 10-0743[1]	N/A	No	No
10-0016	230V	N/A	Alarm Float P/N 10-0743[1]	N/A	No	No
10-0028	115V	N/A	Alarm Float 15' Cable	N/A	No	No
10-0126	115V	6" x 4" x 4" NEMA 4X	Alarm Float 15' Cable	115V	Yes	Yes[2]
10-0623	115V	6.5" x 4.5" x 3.0" NEMA 3R	Alarm Float 15' Cable	N/A	Yes	Yes
10-0682	115V	6.5" x 4.5" x 3.0" PVC/UL Indoor/Outdoor Watertight Cord Connectors	Alarm Float 20' Cable	N/A	Yes	Yes
10-1494	115V and 9V Battery	NEMA 1 for indoor use.	Alarm Float 15' Cable	N/A	Yes	Yes

[1] Alarm Float Switch not included. Purchase separately. See FM0526 or use ?oat switch listed (Includes 15' cable).
[2] List to Canadian Standard cULus.